Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 27852

ANALOG DEVICES

Ultralow Offset Voltage Operational Amplifier

OP07

FEATURES

- **Low V_{OS}** ..... **25μV Max**
- **Low V_{OS} Drift** ..... **0.6μV/°C Max**
- **Ultra-Stable vs Time** ..... **1.0μV/Month Max**
- **Low Noise** ..... **0.6μV_{p-p} Max**
- **Wide Input Voltage Range** ..... **±14V**
- **Wide Supply Voltage Range** ..... **±3V to ±18V**
- **Fits 725, 108A/308A, 741, AD510 Sockets**
- **125°C Temperature-Tested Dice**

ORDERING INFORMATION †

T_A = +25°C V_{OS} MAX (μV)	PACKAGE TO-99	CERDIP 8-PIN	PLASTIC 8-PIN	LCC 20-CONTACT	OPERATING TEMPERATURE RANGE
25	OP07AJ*	OP07AZ*	—	—	MIL
75	OP07EJ	OP07EZ	OP07EP	—	COM
75	OP07J*	OP07Z*	—	OP07RC/883	MIL
150	OP07CJ	OP07CZ	OP07CP	—	XIND
150	—	—	OP07CS††	—	XIND
150	OP07DJ	—	OP07DP	—	XIND

* For devices processed in total compliance to MIL-STD-883, add /883 after part number. Consult factory for 883 data sheet.

† Burn-in is available on commercial and industrial temperature range parts in CerDIP, plastic DIP, and TO-can packages.

†† For availability and burn-in information on SO and PLCC packages, contact your local sales office.

GENERAL DESCRIPTION

The OP-07 has very low input offset voltage (25μV max for OP-07A) which is obtained by trimming at the wafer stage. These low offset voltages generally eliminate any need for external nulling. The OP-07 also features low input bias current (±2nA for OP-07A) and high open-loop gain (300V/mV for OP-07A). The low offsets and high open-loop gain make the OP-07 particularly useful for high-gain instrumentation applications.

The wide input voltage range of ±13V minimum combined with high CMRR of 110dB (OP-07A) and high input impedace provides high accuracy in the noninverting circuit configuration. Excellent linearity and gain accuracy can be maintained even at high closed-loop gains.

Stability of offsets and gain with time or variations in temperture is excellent. The accuracy and stability of the OP-07, even at high gain, combined with the freedom from external nulling have made the OP-07 a new industry standard for instrumentation and military applications.

The OP-07 is available in five standard performance grades. The OP-07A and the OP-07 are specified for operation over the full military range of −55°C to +125°C; the OP-07E is specified for operation over the 0°C to +70°C range, and OP-07C and D over the −40°C to +85°C temperature range.

The OP-07 is available in hermetically-sealed TO-99 metal can or ceramic 8-pin Mini-DIP, and in epoxy 8-pin Mini-DIP. It is a direct replacement for 725, 108A, and OP-05 amplifiers; 741-types may be directly replaced by removing the 741's nulling potentiometer. The OP-207, a dual OP-07, is available for applications requiring close matching of two OP-07 amplifiers. For improved specifications, see the OP-77/OP-177.

PIN CONNECTIONS



TO-99 (J-Suffix)



EPOXY MINI-DIP (P-Suffix)
8-PIN HERMETIC DIP (Z-Suffix)
8-PIN SO (S-Suffix)



OP-07RC/883 LCC (RC-Suffix)

SIMPLIFIED SCHEMATIC

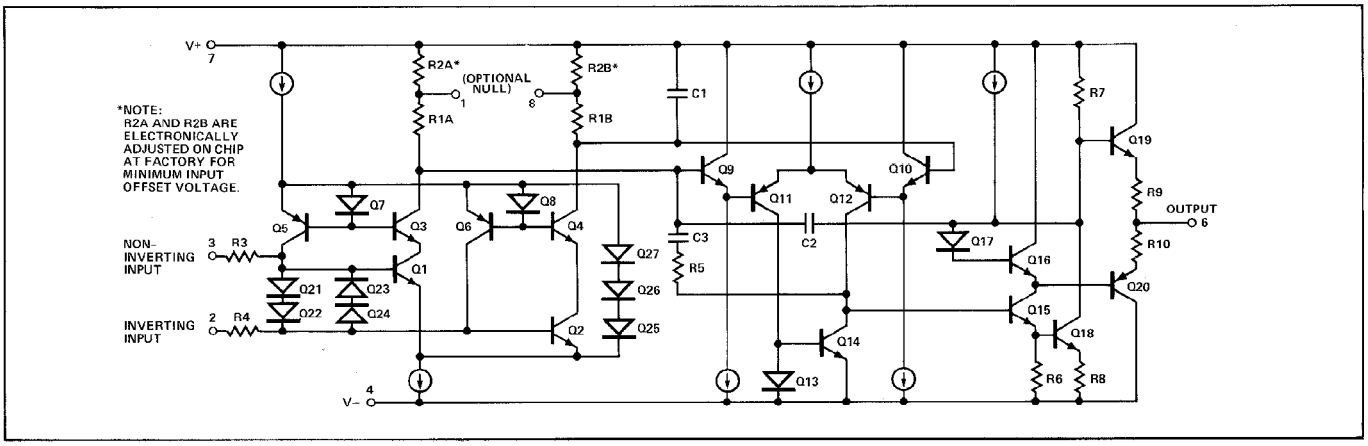

ABSOLUTE MAXIMUM RATINGS (Note 1)

Supply Voltage ..... ±22V
Differential Input Voltage ..... ±30V
Input Voltage (Note 2) ..... ±22V
Output Short-Circuit Duration ..... Indefinite
Storage Temperature Range
J, RC and Z Packages ..... –65°C to +150°C
P Package ..... –65°C to +125°C
Operating Temperature Range
OP-07A, OP-07, OP-07RC ..... –55°C to +125°C
OP-07E ..... 0°C to +70°C
OP-07C, OP-07D ..... –40°C to +85°C
Lead Temperature (Soldering, 60 sec) ..... +300°C
Junction Temperature (T_j) ..... +150°C

PACKAGE TYPE	Θ_{jA} (Note 3)	Θ_{jC}	UNITS
TO-99 (J)	150	18	°C/W
8-Pin Hermetic DIP (Z)	148	16	°C/W
8-Pin Plastic DIP (P)	103	43	°C/W
20-Contact LCC	98	38	°C/W
8-Pin SO (S)	158	43	°C/W

NOTES:
1. Absolute maximum ratings apply to both DICE and packaged parts, unless otherwise noted.
2. For supply voltages less than ±22V, the absolute maximum input voltage is equal to the supply voltage.
3. Θ_{jA} is specified for worst case mounting conditions, i.e., Θ_{jA} is specified for device in socket for TO, CerDIP, P-DIP, and LCC packages; Θ_{jA} is specified for device soldered to printed circuit board for SO package.

ELECTRICAL CHARACTERISTICS at $V_S = \pm 15V$, $T_A = 25°C$, unless otherwise noted.

			OP-07A			OP-07			
PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	MIN	TYP	MAX	UNITS
Input Offset Voltage	V_{OS}	(Note 1)	—	10	25	—	30	75	μV
Long-Term Input Offset Voltage Stability	ΔV_{OS}/Time	(Note 2)	—	0.2	1.0	—	0.2	1.0	μV/Mo
Input Offset Current	I_{OS}		—	0.3	2.0	—	0.4	2.8	nA
Input Bias Current	I_B		—	±0.7	±2.0	—	±1.0	±3.0	nA
Input Noise Voltage	e_{np-p}	0.1Hz to 10Hz (Note 3)	—	0.35	0.6	—	0.35	0.6	μV_{p-p}
Input Noise Voltage Density	e_n	f_O = 10Hz (Note 3)	—	10.3	18.0	—	10.3	18.0	$nV/\sqrt{Hz}$
		f_O = 100Hz (Note 3)	—	10.0	13.0	—	10.0	13.0	
		f_O = 1000Hz (Note 3)	—	9.6	11.0	—	9.6	11.0	
Input Noise Current	i_{np-p}	0.1Hz to 10Hz (Note 3)	—	14	30	—	14	30	pA_{p-p}
Input Noise Current Density	i_n	f_O = 10Hz (Note 3)	—	0.32	0.80	—	0.32	0.80	$pA/\sqrt{Hz}$
		f_O = 100Hz (Note 3)	—	0.14	0.23	—	0.14	0.23	
		f_O = 1000Hz (Note 3)	—	0.12	0.17	—	0.12	0.17	
Input Resistance — Differential-Mode	R_{IN}	(Note 4)	30	80	—	20	60	—	MΩ
Input Resistance — Common-Mode	R_{INCM}		—	200	—	—	200	—	GΩ
Input Voltage Range	IVR		±13	±14	—	±13	±14	—	V
Common-Mode Rejection Ratio	CMRR	$V_{CM} = \pm 13V$	110	126	—	110	126	—	dB
Power Supply Rejection Ratio	PSRR	$V_S = \pm 3V$ to $\pm 18V$	—	4	10	—	4	10	μV/V
Large-Signal Voltage Gain	A_{VO}	$R_L \geq 2k\Omega$, $V_O = \pm 10V$	300	500	—	200	500	—	V/mV
		$R_L \geq 500\Omega$, $V_O = \pm 0.5V$, $V_S = \pm 3V$ (Note 4)	150	400	—	150	400	—	
Output Voltage Swing	V_O	$R_L \geq 10k\Omega$	±12.5	±13.0	—	±12.5	±13.0	—	V
		$R_L \geq 2k\Omega$	±12.0	±12.8	—	±12.0	±12.8	—	
		$R_L \geq 1k\Omega$	±10.5	±12.0	—	±10.5	±12.0	—	
Slew Rate	SR	$R_L \geq 2k\Omega$ (Note 3)	0.1	0.3	—	0.1	0.3	—	V/μs
Closed-Loop Bandwidth	BW	$A_{VCL} = +1$ (Note 3)	0.4	0.6	—	0.4	0.6	—	MHz
Open-Loop Output Resistance	R_O	$V_O = 0$, $I_O = 0$	—	60	—	—	60	—	Ω
Power Consumption	P_d	$V_S = \pm 15V$, No Load	—	75	120	—	75	120	mW
		$V_S = \pm 3V$, No Load	—	4	6	—	4	6	
Offset Adjustment Range		$R_P = 20k\Omega$	—	±4	—	—	±4	—	mV

NOTES:
1. OP-07A grade V_{OS} is measured approximately one minute after application of power. For all other grades V_{OS} is measured approximately 0.5 seconds after application of power.
2. Long-Term Input Offset Voltage Stability refers to the averaged trend line of V_{OS} vs. Time over extended periods after the first 30 days of operation. Excluding the initial hour of operation, changes in V_{OS} during the first 30 operating days are typically 2.5μV — refer to typical performance curves. Parameter is sample tested.
3. Sample tested.
4. Guaranteed by design.

ELECTRICAL CHARACTERISTICS at $V_S = \pm 15V$, $-55°C \leq T_A \leq +125°C$, unless otherwise noted.

PARAMETER	SYMBOL	CONDITIONS	OP-07A MIN	OP-07A TYP	OP-07A MAX	OP-07 MIN	OP-07 TYP	OP-07 MAX	UNITS
Input Offset Voltage	V_{OS}	(Note 1)	—	25	60	—	60	200	μV
Average Input Offset Voltage Drift Without External Trim	TCV_{OS}	(Note 2)	—	0.2	0.6	—	0.3	1.3	μV/°C
With External Trim	TCV_{OSn}	$R_P = 20k\Omega$ (Note 3)	—	0.2	0.6	—	0.3	1.3	μV/°C
Input Offset Current	I_{OS}		—	0.8	4	—	1.2	5.6	nA
Average Input Offset Current Drift	TCI_{OS}	(Note 2)	—	5	25	—	8	50	pA/°C
Input Bias Current	I_B		—	±1	±4	—	±2	±6	nA
Average Input Bias Current Drift	TCI_B	(Note 2)	—	8	25	—	13	50	pA/°C
Input Voltage Range	IVR		±13	±13.5	—	±13	±13.5	—	V
Common-Mode Rejection Ratio	CMRR	$V_{CM} = \pm 13V$	106	123	—	106	123	—	dB
Power Supply Rejection Ratio	PSRR	$V_S = \pm 3V$ to $\pm 18V$	—	5	20	—	5	20	μV/V
Large-Signal Voltage Gain	A_{VO}	$R_L \geq 2k\Omega$, $V_O = \pm 10V$	200	400	—	150	400	—	V/mV
Output Voltage Swing	V_O	$R_L \geq 2k\Omega$	±12	±12.6	—	±12	±12.6	—	V

NOTES:
1. OP-07A grade V_{OS} is measured approximately one minute after application of power. For all other grades V_{OS} is measured approximately 0.5 seconds after application of power.
2. Sample tested.
3. Guaranteed by design.

TYPICAL OFFSET VOLTAGE TEST CIRCUIT

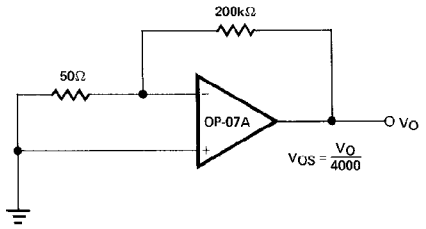

TYPICAL LOW-FREQUENCY NOISE TEST CIRCUIT

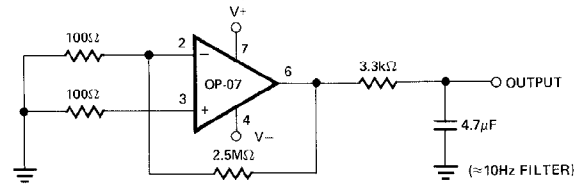

INPUT REFERRED NOISE = $\frac{V_O}{25,000} = \frac{5mV/cm}{25,000} = 200nV/cm$

(SEE SCOPE PHOTO IN TYPICAL PERFORMANCE CURVES)

PINOUTS SHOWN FOR J, P, AND Z PACKAGES

OPTIONAL OFFSET NULLING CIRCUIT

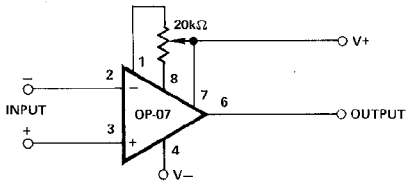

PINOUTS SHOWN FOR J, P, AND Z PACKAGES

BURN-IN CIRCUIT



PINOUTS SHOWN FOR J, P, AND Z PACKAGES

ELECTRICAL CHARACTERISTICS at $V_S = \pm 15V$, $T_A = 25°C$, unless otherwise noted.

PARAMETER	SYMBOL	CONDITIONS	OP-07E MIN	OP-07E TYP	OP-07E MAX	OP-07C MIN	OP-07C TYP	OP-07C MAX	OP-07D MIN	OP-07D TYP	OP-07D MAX	UNITS
Input Offset Voltage	V_{OS}	(Note 1)	—	30	75	—	60	150	—	60	150	μV
Long-Term V_{OS} Stability	V_{OS}/Time	(Note 2)	—	0.3	1.5	—	0.4	2.0	—	0.5	3.0	μV/Mo
Input Offset Current	I_{OS}		—	0.5	3.8	—	0.8	6.0	—	0.8	6.0	nA
Input Bias Current	I_B		—	±1.2	±4.0	—	±1.8	±7.0	—	±2.0	±12	nA
Input Noise Voltage	e_{np-p}	0.1Hz to 10Hz (Note 3)	—	0.35	0.6	—	0.38	0.65	—	0.38	0.65	μV_{p-p}
Input Noise Voltage Density	e_n	f_O = 10Hz	—	10.3	18.0	—	10.5	20.0	—	10.5	20.0	$nV/\sqrt{Hz}$
		f_O = 100Hz (Note 3)	—	10.0	13.0	—	10.2	13.5	—	10.3	13.5	
		f_O = 1000Hz	—	9.6	11.0	—	9.8	11.5	—	9.8	11.5	
Input Noise Current	i_{np-p}	0.1Hz to 10Hz (Note 3)	—	14	30	—	15	35	—	15	35	pA_{p-p}
Input Noise Current Density	i_n	f_O = 10Hz	—	0.32	0.80	—	0.35	0.90	—	0.35	0.90	$pA/\sqrt{Hz}$
		f_O = 100Hz (Note 3)	—	0.14	0.23	—	0.15	0.27	—	0.15	0.27	
		f_O = 1000Hz	—	0.12	0.17	—	0.13	0.18	—	0.13	0.18	
Input Resistance — Differential-Mode	R_{IN}	(Note 4)	15	50	—	8	33	—	7	31	—	MΩ
Input Resistance — Common-Mode	R_{INCM}		—	160	—	—	120	—	—	120	—	GΩ
Input Voltage Range	IVR		±13	±14	—	±13	±14	—	±13	±14	—	V
Common-Mode Rejection Ratio	CMRR	V_{CM} = ±13V	106	123	—	100	120	—	94	110	—	dB
Power Supply Rejection Ratio	PSRR	V_S = ±3V to ±18V	—	5	20	—	7	32	—	7	32	μV/V
Large-Signal Voltage Gain	A_{VO}	$R_L \geq 2k\Omega$, V_O = ±10V	200	500	—	120	400	—	120	400	—	V/mV
		$R_L \geq 500\Omega$, V_O = ±0.5V, V_S = ±3V (Note 4)	150	400	—	100	400	—	—	400	—	
Output Voltage Swing	V_O	$R_L \geq 10k\Omega$	±12.5	±13.0	—	±12.0	±13.0	—	±12.0	±13.0	—	V
		$R_L \geq 2k\Omega$	±12.0	±12.8	—	±11.5	±12.8	—	±11.5	±12.8	—	
		$R_L \geq 1k\Omega$	±10.5	±12.0	—	—	±12.0	—	—	±12.0	—	
Slew Rate	SR	$R_L \geq 2k\Omega$ (Note 3)	0.1	0.3	—	0.1	0.3	—	0.1	0.3	—	V/μs
Closed-Loop Bandwidth	BW	A_{VCL} = +1 (Note 5)	0.4	0.6	—	0.4	0.6	—	0.4	0.6	—	MHz
Open-Loop Output Resistance	R_O	V_O = 0, I_O = 0	—	60	—	—	60	—	—	60	—	Ω
Power Consumption	P_d	V_S = ±15V, No Load	—	75	120	—	80	150	—	80	150	mW
		V_S = ±3V, No Load	—	4	6	—	4	8	—	4	8	
Offset Adjustment Range		R_P = 20kΩ	—	±4	—	—	±4	—	—	±4	—	mV

NOTES:

1. Input Offset Voltage measurements are performed by automated test equipment approximately 0.5 seconds after application of power.
2. Long-Term Input Offset Voltage Stability refers to the averaged trend line of V_{OS} vs. Time over extended periods after the first 30 days of operation. Excluding the initial hour of operation, changes in V_{OS} during the first 30 operating days are typically 2.5μV — refer to typical performance curves. Parameter is sample tested.
3. Sample tested.
4. Guaranteed by design.
5. Guaranteed but not tested.

ELECTRICAL CHARACTERISTICS at $V_S = \pm 15V$, $0°C \le T_A \le +70°C$ for OP-07E, and $-40°C \le T_A \le +85°C$ for OP-07C/D, unless otherwise noted.

PARAMETER	SYMBOL	CONDITIONS	OP-07E MIN	OP-07E TYP	OP-07E MAX	OP-07C MIN	OP-07C TYP	OP-07C MAX	OP-07D MIN	OP-07D TYP	OP-07D MAX	UNITS
Input Offset Voltage	V_{OS}	(Note 1)	—	45	130	—	85	250	—	85	250	μV
Average Input Offset Voltage Drift Without External Trim	TCV_{OS}	(Note 3)	—	0.3	1.3	—	0.5	1.8	—	0.7	2.5	μV/°C
With External Trim	TCV_{OSn}	$R_P = 20k\Omega$ (Note 3)	—	0.3	1.3	—	0.4	1.6	—	0.7	2.5	μV/°C
Input Offset Current	I_{OS}		—	0.9	5.3	—	1.6	8.0	—	1.6	8.0	nA
Average Input Offset Current Drift	TCI_{OS}	(Note 2)	—	8	35	—	12	50	—	12	50	pA/°C
Input Bias Current	I_B		—	±1.5	±5.5	—	±2.2	±9.0	—	±3.0	±14	nA
Average Input Bias Current Drift	TCI_B	(Note 2)	—	13	35	—	18	50	—	18	50	pA/°C
Input Voltage Range	IVR		±13.0	±13.5	—	±13.0	±13.5	—	±13.0	±13.5	—	V
Common-Mode Rejection Ratio	CMRR	$V_{CM} = \pm 13V$	103	123	—	97	120	—	94	106	—	dB
Power Supply Rejection Ratio	PSRR	$V_S = \pm 3V$ to $\pm 18V$	—	7	32	—	10	51	—	10	51	μV/V
Large-Signal Voltage Gain	A_{VO}	$R_L \ge 2k\Omega$, $V_O = \pm 10V$	180	450	—	100	400	—	100	400	—	V/mV
Output Voltage Swing	V_O	$R_L \ge 2k\Omega$	±12	±12.6	—	±11	±12.6	—	±11	±12.6	—	V

NOTES:
1. Input offset voltage measurements are performed by automated test equipment approximately 0.5 seconds after application of power.
2. Sample tested.
3. Guaranteed by design.

DICE CHARACTERISTICS (125°C TESTED DICE AVAILABLE)

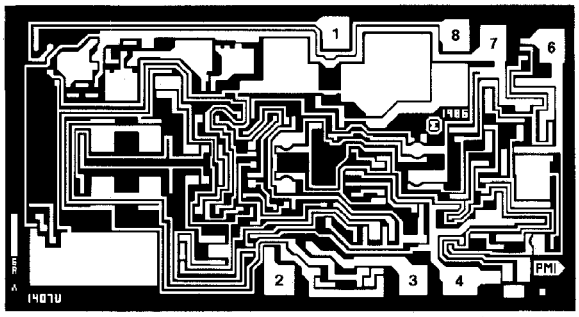

DIE SIZE 0.100 × 0.055 inch, 5500 sq. mils
(2.54 × 1.40 mm, 3.56 sq. mm)

1. BALANCE
2. INVERTING INPUT
3. NONINVERTING INPUT
4. V−
6. OUTPUT
7. V+
8. BALANCE

WAFER TEST LIMITS at $V_S = \pm 15V$, $T_A = 25°C$ for OP-07N, OP-07G and OP-07GR devices; $T_A = 125°C$ for OP-07NT and OP-07GT devices, unless otherwise noted.

PARAMETER	SYMBOL	CONDITIONS	OP-07NT LIMIT	OP-07N LIMIT	OP-07GT LIMIT	OP-07G LIMIT	OP-07GR LIMIT	UNITS
Input Offset Voltage	V_{OS}		140	40	210	80	150	μV MAX
Input Offset Current	I_{OS}		4.0	2.0	5.6	2.8	6.0	nA MAX
Input Bias Current	I_B		±4	±2	±6	±3	±7	nA MAX
Input Resistance Differential-Mode	R_{IN}	(Note 2)	—	20	—	20	8	MΩ MIN
Input Voltage Range	IVR		±13	±13	±13	±13	±13	V MIN
Common-Mode Rejection Ratio	CMRR	$V_{CM} = \pm 13V$	100	110	100	110	100	dB MIN
Power Supply Rejection Ratio	PSRR	$V_S = \pm 3V$ to $\pm 18V$	20	10	20	10	30	μV/V MAX
Output Voltage Swing	V_O	$R_L = 10k\Omega$ $R_L = 2k\Omega$ $R_L = 1k\Omega$	— ±12.0 —	±12.5 ±12.0 ±10.5	— ±12.0 —	±12.0 ±11.5 ±10.5	±12.0 ±11.5 —	V MIN
Large-Signal Voltage Gain	A_{VO}	$R_L = 2k\Omega$ $V_O = \pm 10V$	200	200	150	120	120	V/mV MIN
Differential Input Voltage			±30	±30	±30	±30	±30	V MAX
Power Consumption	P_d	$V_{OUT} = 0V$	—	120	—	120	150	mW MAX

NOTES:
1. For 25°C characteristics of OP-07NT and OP-07GT, see OP-07N and OP-07G characteristics, respectively.
2. Guaranteed by design.

Electrical tests are performed at wafer probe to the limits shown. Due to variations in assembly methods and normal yield loss, yield after packaging is not guaranteed for standard product dice. Consult factory to negotiate specifications based on dice lot qualification through sample lot assembly and testing.

TYPICAL ELECTRICAL CHARACTERISTICS at $V_S = \pm 15V$, $T_A = +25°C$, unless otherwise noted.

PARAMETER	SYMBOL	CONDITIONS	OP-07NT TYPICAL	OP-07N TYPICAL	OP-07GT TYPICAL	OP-07G TYPICAL	OP-07GR TYPICAL	UNITS
Average Input Offset Voltage Drift	TCV_{OS}	$R_S = 50\Omega$	0.2	0.2	0.3	0.3	0.7	μV/°C
Nulled Input Offset Voltage Drift	TCV_{OSn}	$R_S = 50\Omega$, $R_P = 20k\Omega$	0.2	0.2	0.3	0.3	0.7	μV/°C
Average Input Offset Current Drift	TCI_{OS}		5	5	8	8	12	pA/°C
Slew Rate	SR	$R_L \geq 2k\Omega$	0.3	0.3	0.3	0.3	0.3	V/μs
Closed-Loop Bandwidth	BW	$A_{VCL} = +1$	0.6	0.6	0.6	0.6	0.6	MHz

TYPICAL PERFORMANCE CHARACTERISTICS

OPEN-LOOP GAIN vs TEMPERATURE

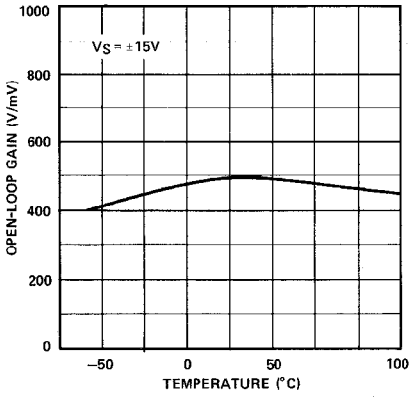

OFFSET VOLTAGE CHANGE DUE TO THERMAL SHOCK

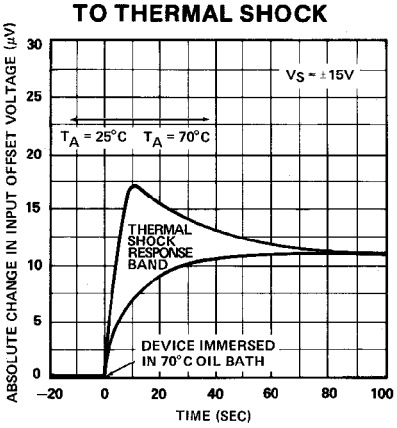

WARM-UP DRIFT

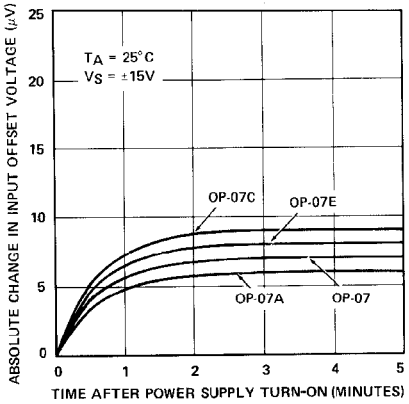

MAXIMUM ERROR vs SOURCE RESISTANCE

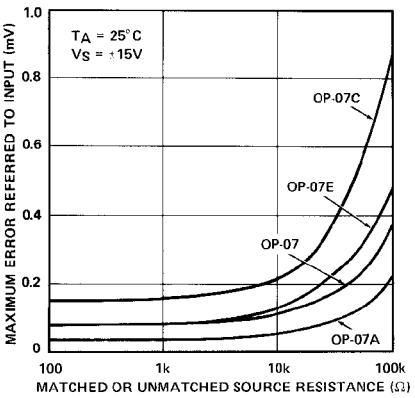

MAXIMUM ERROR vs SOURCE RESISTANCE

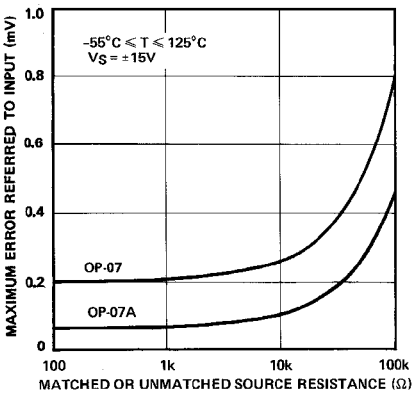

MAXIMUM ERROR vs SOURCE RESISTANCE

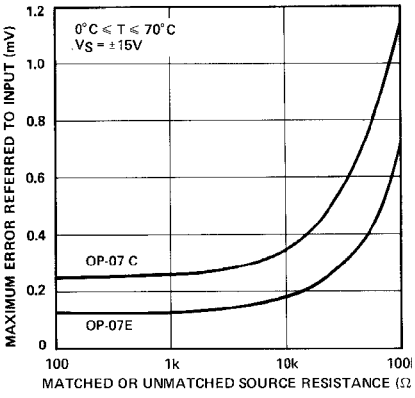

INPUT BIAS CURRENT vs DIFFERENTIAL INPUT VOLTAGE

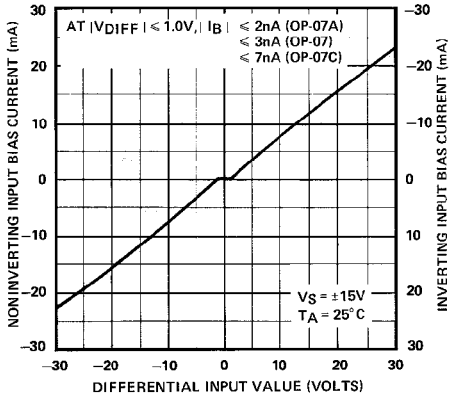

INPUT BIAS CURRENT vs TEMPERATURE

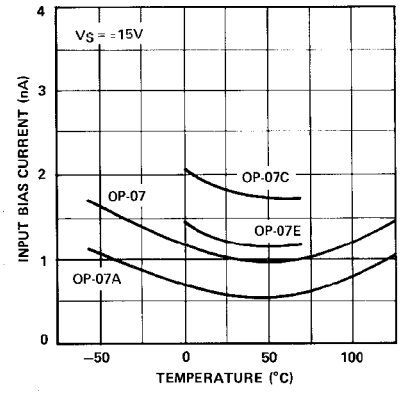

INPUT OFFSET CURRENT vs TEMPERATURE

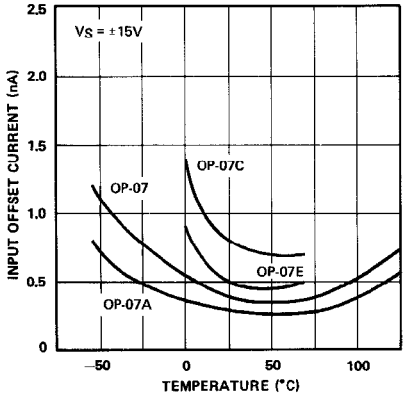

TYPICAL PERFORMANCE CHARACTERISTICS

OP-07 LOW FREQUENCY NOISE

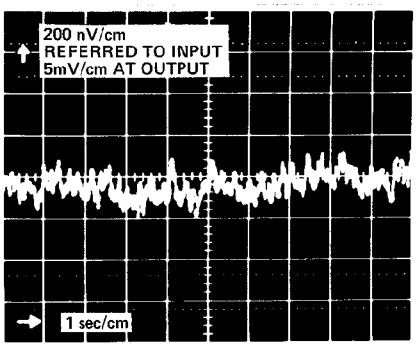

TOTAL INPUT NOISE VOLTAGE vs FREQUENCY

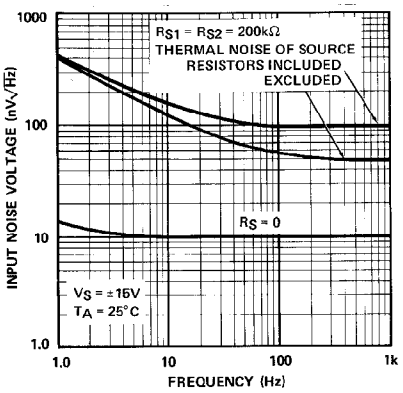

INPUT WIDEBAND NOISE vs BANDWIDTH (0.1Hz TO FREQUENCY INDICATED)

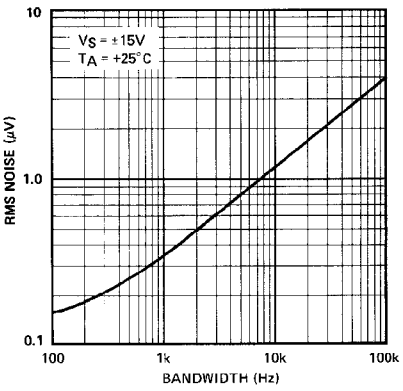

CMRR vs FREQUENCY

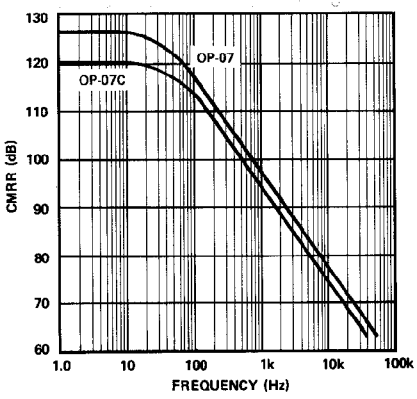

PSRR vs FREQUENCY

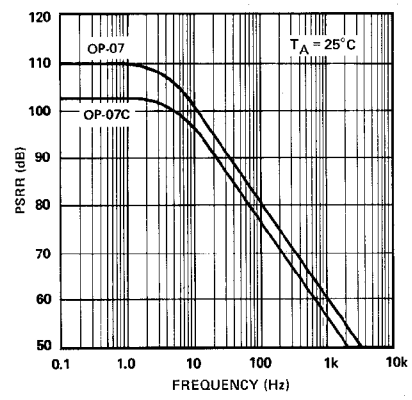

OPEN-LOOP GAIN vs POWER SUPPLY VOLTAGE

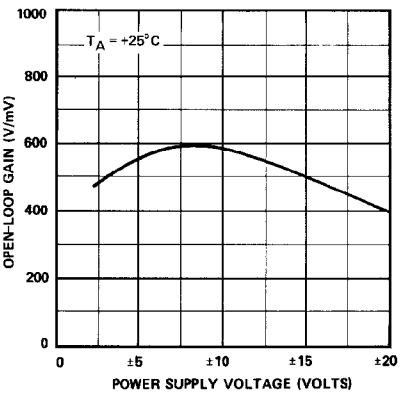

OPEN-LOOP FREQUENCY RESPONSE

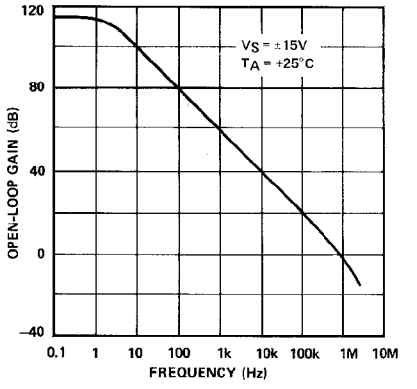

CLOSED-LOOP RESPONSE FOR VARIOUS GAIN CONFIGURATIONS

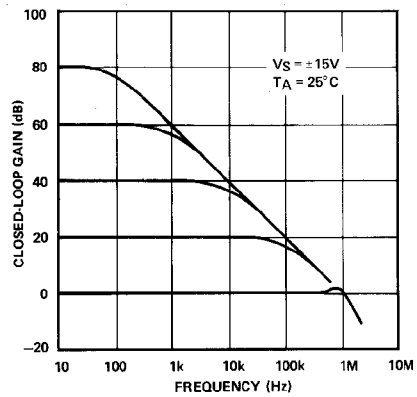

MAXIMUM OUTPUT SWING vs FREQUENCY

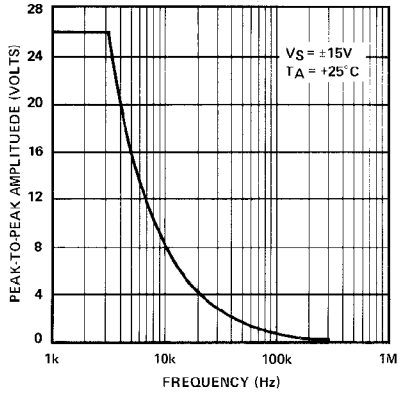

TYPICAL PERFORMANCE CHARACTERISTICS

MAXIMUM OUTPUT VOLTAGE vs LOAD RESISTANCE

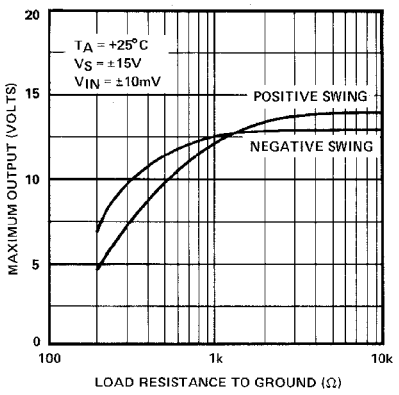

POWER CONSUMPTION vs POWER SUPPLY

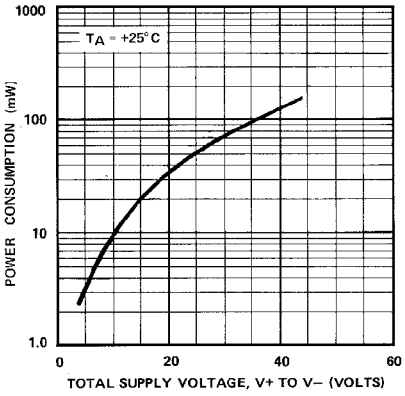

OUTPUT SHORT-CIRCUIT CURRENT vs TIME

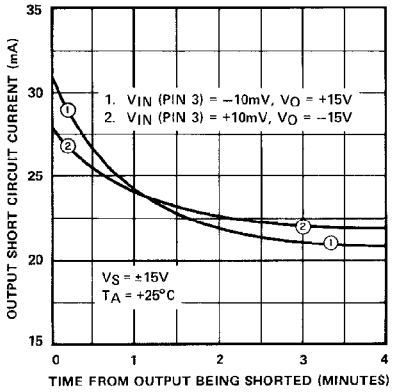
1. V_{IN} (PIN 3) = –10mV, V_O = +15V
2. V_{IN} (PIN 3) = +10mV, V_O = –15V
V_S = ±15V
T_A = +25°C
OUTPUT SHORT CIRCUIT CURRENT (mA)
TIME FROM OUTPUT BEING SHORTED (MINUTES)

UNTRIMMED OFFSET VOLTAGE vs TEMPERATURE

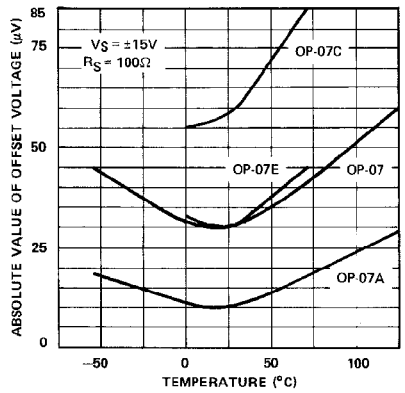

TRIMMED OFFSET VOLTAGE vs TEMPERATURE

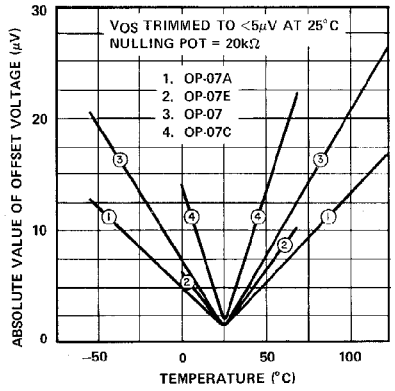

OFFSET VOLTAGE STABILITY vs TIME

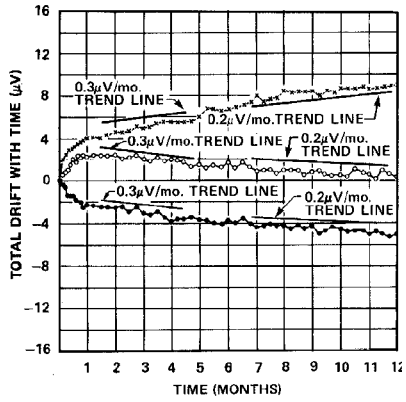

TYPICAL APPLICATIONS

HIGH SPEED, LOW V_{OS}, COMPOSITE AMPLIFIER

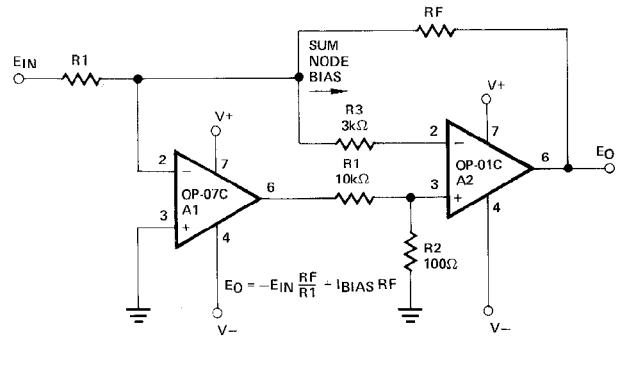

PINOUTS SHOWN FOR J, P, AND Z PACKAGES

ADJUSTMENT-FREE PRECISION SUMMING AMPLIFIER

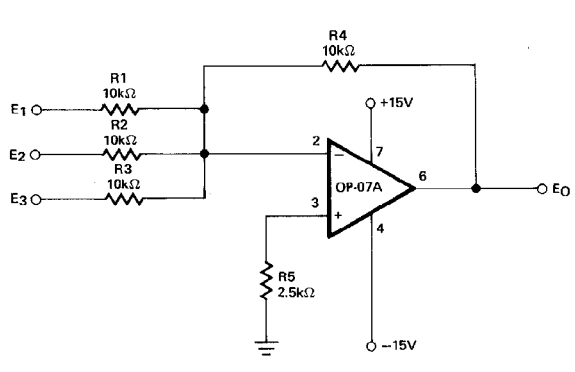

PINOUTS SHOWN FOR J, P, AND Z PACKAGES

TYPICAL APPLICATIONS

HIGH-STABILITY THERMOCOUPLE AMPLIFIER

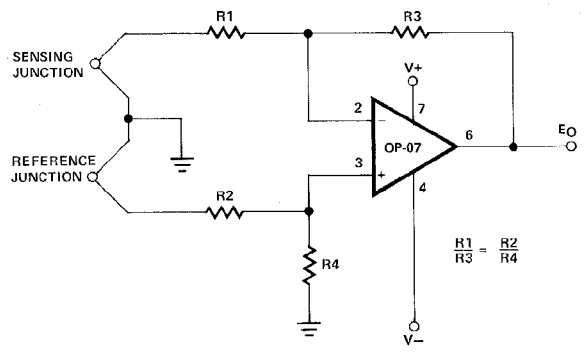

PINOUTS SHOWN FOR J, P, AND Z PACKAGES

PRECISION ABSOLUTE-VALUE CIRCUIT

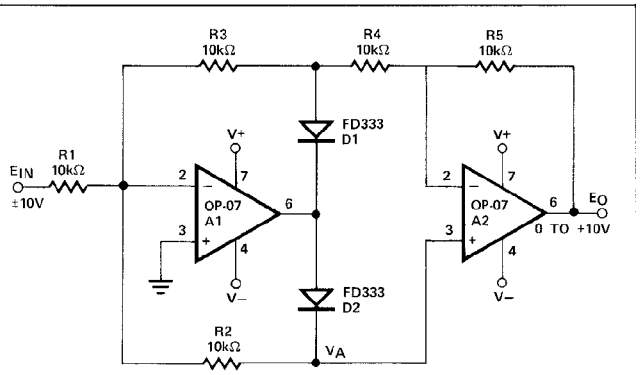

PINOUTS SHOWN FOR J, P, AND Z PACKAGES

APPLICATIONS INFORMATION

OP-07 series units may be substituted directly into 725, 108A/308A* and OP-05 sockets with or without removal of external compensation or nulling components. Additionally, the OP-07 may be used in unnulled 741-type sockets. However, if conventional 741 nulling circuitry is in use, it should be modified or removed to enable proper OP-07 operation. OP-07 offset voltage may be nulled to zero through use of a potentiometer (see offset nulling circuit diagram).

The OP-07 provides stable operation with load capacitance of up to 500pF and ±10V swings; larger capacitances should be decoupled with a 50Ω decoupling resistor.

Stray thermoelectric voltages generated by dissimilar metals at the contacts to the input terminals can degrade drift performance. Therefore, best operation will be obtained when both input contacts are maintained at the same temperature, preferably close to the package temperature.

*TO-99 Package only